
HPE Networking Comware Switch Series 5720

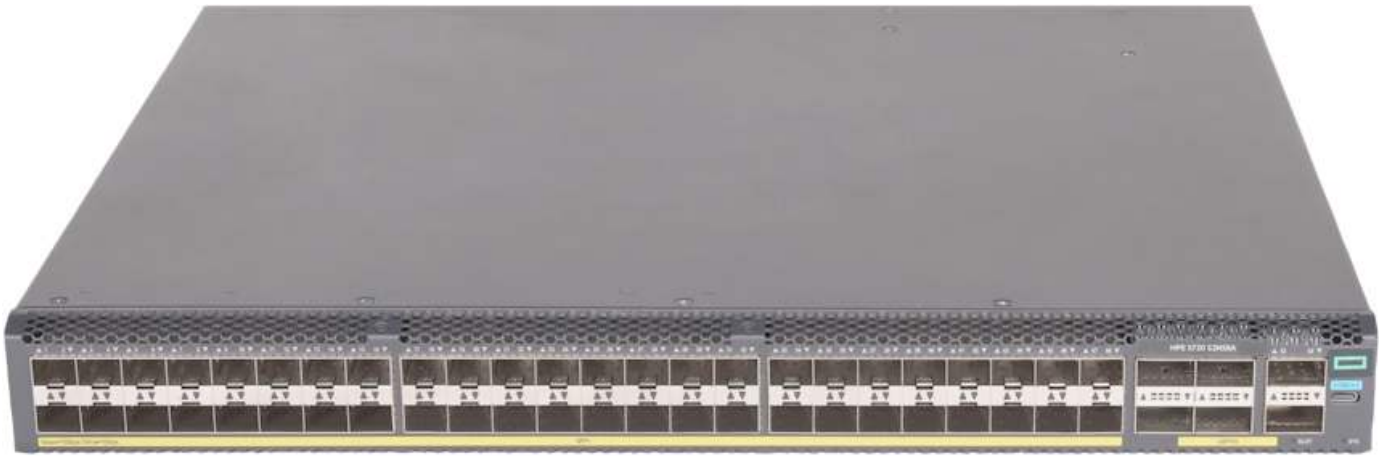

What's new

- Cost-effective access switch with hybrid SFP+ and 10GBASE-T with multigigabit options on 10GBASE-T port—5G, 2.5G, 1G.
- DRNI combines multiple physical switches into one virtual distributed-relay (DR) system for doubling aggregate bandwidth, faster forwarding, resiliency, and high availability.
- Virtual Extensible LAN (VXLAN) with lite Ethernet VPN (EVPN) allows greater flexibility, better performance with wirespeed, enhanced security, and better scalability.
- Hardware-based MACsec enable end-to-end encrypted security.
- The Intelligent Resilient Fabric (IRF) technology enabling greater resilience and scalability with IRF stacking.
- VXLAN and EVPN enable isolation and greater scalability of L2/L3 overlay services and multicast.

Overview

HPE Networking Comware Switch Series 5720 is designed to cater to diverse customer needs. This cost-effective access switch offers hybrid SFP+ and 10GBASE-T options, along with multigigabit support on 10GBASE-T ports, allowing scalability from 10GbE SFP+ to 100G QSFP28.
These data center leaf / access layer switches come with MACsec support and 10GBASE-T additional modules. Features such as distributed resilient network interconnect (DRNI) and HPE Intelligent Resilient Fabric (IRF) enhance network resiliency while redundant pluggable power supplies provide a dynamic and highly available network.
Moreover, these switches support HPE Intelligent Management Center (IMC), which delivers a consistent network manageability experience. Streamline network management processes for greater efficiency through centralized configuration, compliance, policy management, monitoring, and troubleshooting.

Features

Multigigabit High-density Switches

The HPE Networking Comware Switch Series 5720 provides medium and large enterprise networks with 24/40 port 1G/2.5G/5G/10GBASE-T and 32/48 port 10G SFP+ connectivity options, thereby resulting in high density and flexibility.

The switch series delivers up to 1001.7 Mpps of packet forwarding rate and up to 2240 Gbps of switching capacity.

It supports jumbo frames with a frame size of up to 9216 bytes, improving the performance of large data transfers.

It supports equal-cost multi-path that enables multiple equal-cost links in a routing environment to increase link redundancy and scale bandwidth.

Highly Available and Scalable Access Layer Switches

The HPE Networking Comware Switch Series 5720 uses Intelligent Resilient Framework (IRF) that supports virtualization of up to nine physical switches into one logical device for simpler, flatter, and more agile networks.

DRNI, an IEEE standard-based solution, enables link aggregation from multiple switches to implement device-level link backup for node redundancy. DRNI also simplifies network topology by virtualizing two physical devices into a logical device.

Dual, redundant, hot-swappable power supplies maintain a dynamic and highly available network.

VXLAN and EVPN allow greater flexibility to integrate into existing networks, better scalability without redesigning the underlay network, enhanced security to restrict attacks, and improved performance, especially in spine-leaf architectures.

Robust Quality of Service (QoS)

The HPE Networking Comware Switch Series 5720 supports operations, administration, and maintenance (OAM) and In-Service Software Upgrade (ISSU) for business continuity and improving manageability.

It supports advanced classifier-based QoS, which groups traffic using multiple match criteria based on Layer 2 and 3 information; it applies QoS policies such as setting priority level and rate limit to selected traffic on a port, VLAN, or the entire switch.

This switch series provides extensive traffic prioritization with strict priority (SP) queuing, weighted round robin (WRR), and SP+WRR.

Broadcast control and limitation of broadcast traffic rate can reduce unwanted network traffic.

Comprehensive Security and Simplified Management

HPE Networking Comware Switch Series 5720 supports AAA authentication (including RADIUS authentication) and dynamic or static binding of user identifiers such as user account, IP address, MAC address, VLAN, and port number.

The switch series supports methods including 802.1X and MAC authentication and encryption for greater device security and policy-driven application authentication. Per-user access control lists (ACLs) provide identity-driven security and access control.

Dynamic Address Resolution Protocol (ARP) protection with functions such as ARP detection and ARP packet validation that block broadcasts from unauthorized hosts and prevent eavesdropping or theft of network data.

This switch series provides a single pane management via through HPE Intelligent Management Center (IMC), maintaining comprehensive configuration, compliance, and policy management to enable end-to-end network visibility, control, and a consistent network experience.

It supports HPE IMC Orchestrator and Analyzer that offers orchestration, underlay and overlay automated service provisioning, centralized control and AI-enabled network health monitoring with telemetry, and visual dashboards for fault detection and resolution.

Technical specifications	HPE Networking Comware Switch Series 5720
Power consumption	From 89 W to 99 W, depending on the model
Heat dissipation	From 785 BTU/h to 921 BTU/h, depending on the model
Input voltage	VAC : From 100V to 240V VDC : From -48V to -60V
Ports	48 SPF+, 40 1/10GBASE-T and 8 SFP+, 32 SFP+ or 24 10GBASE-T and 8 SFP+ ports, depending on model. All models also have 6 QSFP28 ports.
Latency	< 3 µs
Routing capabilities	RIP, OSPF, BGP, IPV6, MPLS
Switching capacity	2240 Gbps to 2560 Gbps, depending on model
Stacking capabilities	Maximum 9 physical 5720 switches can be combined into one virtual switch configuration and are managed using a single IP address
Throughput	1001 Mpps, maximum, depending on model
Memory and processor	4GB flash, 4GB SDRAM, packet buffer size: 32M Quad Core ARMv8-Cortex-A72;
Power supply	AC: 2 X JL592A/JL593A DC: 2 X JL688A
Management features	IMC, IMC Orchestrator, CLI, out-of-band management, SNMP Manager, Telnet, FTP
Warranty	1-year warranty. See the warranty duration.

SKU comparison

	HPE Networking Comware Data Center Switch 24p 10GBASE-T 8p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N59A)	HPE Networking Comware Data Center Switch 32p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N57A)	HPE Networking Comware Data Center Switch 40p 10GBASE-T 8p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N60A)	HPE Networking Comware Data Center Switch 48p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N58A)
Differentiator	Cost-effective access switch with hybrid SFP+ and 10GBase-T with multigigabit options on 10G Base-T port.	Cost-effective access switch with 32 port SFP+.	Cost-effective access switch with hybrid SFP+ and 10GBase-T with multigigabit options on 10G Base-T port.	Cost-effective access switch with 48 port SFP+.
Power consumption	Dual AC 94 W	Dual AC 90 W	Dual AC 99 W	Dual AC 89 W
Heat dissipation	818 BTU/h	785 BTU/h	921 BTU/h	887 BTU/h
Input voltage	VAC100 V to 240 V VDC-48 V to -60 V			
Ports	24 10G Base-T, 8 SFP+, 6 QSFP28,1 Slot	32 SFP+,6 QSFP28,1 Slot	40 10G Base-T, 8 SFP+, 6 QSFP28,1 Slot	48 SFP+,6 QSFP28,1 Slot
Latency	< 3 µs			
Routing capabilities	RIP, OSPF, BGP, IPV6, MPLS			
Switching capacity	2240 Gbps	2240 Gbps	2560 Gbps	2560 Gbps
Stacking capabilities	IRF stacking 4 switches, maximum stacking 9			
Throughput	1001 Mpps			
Memory and processor	4 GB flash, 4 GB SDRAM, packet buffer size: 32 M Quad Core ARMv8-Cortex-A72;			
Power supply	AC: 2x JL592A/JL593A DC: 2x JL688A			
Management features	IMC, IMC Orchestrator, CLI, out-of-band management, SNMP Manager, Telnet, FTP			

	HPE Networking Comware Data Center Switch 24p 10GBASE-T 8p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N59A)	HPE Networking Comware Data Center Switch 32p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N57A)	HPE Networking Comware Data Center Switch 40p 10GBASE-T 8p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N60A)	HPE Networking Comware Data Center Switch 48p SFP+ 1G/10G 6p QSFP28 100G 5720 (S2N58A)
Warranty	1-year warranty. See the warranty duration.			

HPE Services

No matter where you are in your transformation journey, you can count on HPE Services to deliver the expertise you need when, where and how you need it. From strategy and planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

Advisory & Professional services

Experts can help you map out your path to hybrid cloud and optimize your operations.

Managed services

HPE runs your IT operations, giving you unified control, so can focus on innovation.

Support services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources.

— **HPE Complete Care Service:** a modular service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals. All delivered by an assigned team of HPE experts.

— **HPE Tech Care Service:** the operational service experience for HPE products. The service provides access to product specific experts, an AI driven digital experience, and general technical guidance to help reduce risk and search for ways to do things better.

— **HPE Multivendor Services:** Single point of accountability for managing on-site hardware and software support for multivendor products. HPE experts help manage your IT across technologies and platforms for HPE and non-HPE technologies, acting as the single point of contact for your IT operational needs.

Lifecycle Services

Address your specific IT deployment project needs with tailored project management and deployment services.

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options

Defective Media Retention is optional and allows you to retain Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

GreenLake

GreenLake is the cloud to run and manage your entire hybrid landscape—private, public, and edge. It helps you to:

— Streamline IT Operations across compute, storage, and networking without the chaos

— Unify and secure data, as you move faster

— Accelerate AI, from pilot to production

The result: greater operational efficiency, lower TCO, and faster AI delivery—all from one unified, intelligent platform built for today's hybrid enterprise.

For additional technical information, available models and options, please reference the QuickSpecs

Visit HPE.com

Chat now

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Parts and Materials: HPE will provide HPE-supported replacement parts and materials required to maintain the covered hardware.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

Arm is a registered trademark of Arm Limited. All third-party marks are property of their respective owners.

Image may differ from the actual product.

PSN1014835118NLEN, October, 2026.

HEWLETT PACKARD ENTERPRISE

hpe.com